




Portable hygrometer and thermometer RSTH8000

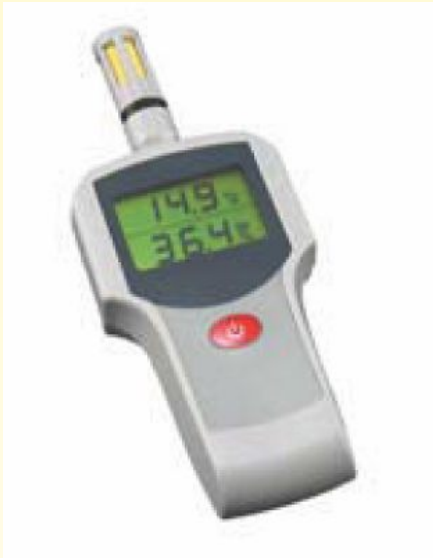

Brief Introduction:

This product is used in measuring and displaying humidity & temperature!

Features:

- Easy to use
- LCD show both temperature and humidity
- High accuracy and quick response
- Long-term stability
- Detecting probe with gold-plating case
- Battery operated, portable

Technical Specification:

Power supply: 4.5V DC (3*1.5V battery)

Operating range: humidity 0-100%RH, temperature -25~75Celsius

Display type: LCD

Accuracy: Humidity +/-2%RH; Temperature +/-0.2Celsius

Resolution: Humidity 0.1%RH; Temperature 0.1Celsius

HTLOG - 742

DIGITAL PORTABLE PROCESS DATALOGGER

HTLOG - 742 (Portable)

- Portable, battery Powered
- Low power Consumption
- Display for both % Rh and Temperature
- Compact ABS Cabinet

FEATURE HIGHLIGHTS

- Direct Reading in case of % RH & Temperature
- 16 Bit ADC
- Resolution Selectable
- Alphanumeric LCD Display with back lit
- RS232 Interface with Windows Software
- Printer port
- Displays 2Channel Simultaneously
- Data logger with 4000 Records Per Channel
- Real Time Clock

RS ENTERPRISES HTLOG 742T series data logger/ Indicator are digital electronic marvels is a power full Datalogger. The unit can store 4,000 records per channel at the programmed interval. You can store as many data sets as you want until memory is full. The unit comes with windows-based software (windows98, NT, XP) for the display & saving.



HTLOG-742TH is a combined unit for measuring temperature & Humidity are in fact two instruments combined into one compact unit for direct reading in case of relative humidity (%RH) & dry bulb temperature without the need to select different probes. The high quality HYGROCLIP Sensor module for measuring Relative humidity & temperature is 100 % Exchangeable with out readjustment which offers advantage of no loss of time in recalibrating & readjusting.